


★635nm 5mW Low Iop type

•Features

1. Low Iop
2. High precision assembly
3. High visibility

•Applications

1. General purpose red laser light source
2. Industrial laser markers / measuring instruments
3. Laser pointers / levelers

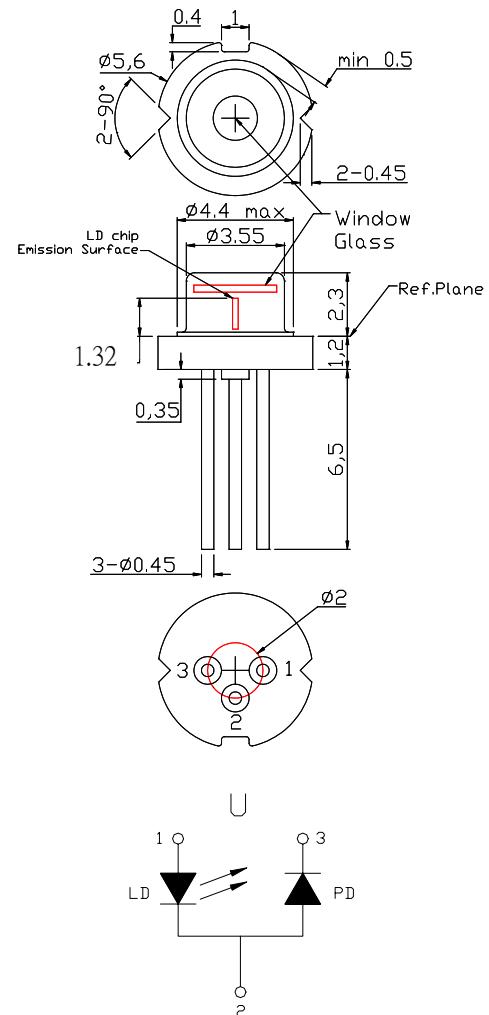

•Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P _O	CW	6	mW
Reverse voltage (LD)	V _{RL}	-	2	V
Reverse voltage (PD)	V _{RD}	-	30	V
Forward current (PD)	I _{FD}	-	10	mA
Case temperature	T _C	-	-10~+50	°C
Storage temperature	T _S	-	-40~+85	°C

•Electrical and optical characteristics (T_c=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	630	635	640	nm	P _O =5mW
Threshold current	I _{th}	-	19	23	mA	
Operating current	I _{op}	-	29	32	mA	P _O =5mW
Operating voltage	V _{op}	-	2.15	2.3	V	P _O =5mW
Differential efficiency	η	0.4	0.5	1.0	mW/mA	P _O =3-5mW
Monitor current*	I _m	0.1	0.23	0.3	mA	P _O =5mW, V _{RD} =5V
Parallel divergence angle	θ	4.5	6.5	8.5	deg	
Perpendicular divergence angle	θ _⊥	30	34	36	deg	
Parallel FFP deviation angle	Δθ	-3	0	+3	deg	P _O =5mW
Perpendicular FFP deviation angle	Δθ _⊥	-3	0	+3	deg	
Emission point accuracy	ΔxΔyΔz	-80	0	+80	um	

*Monitor current ranking is available.

• Precautions







- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

* For reference only. Contents above are subject to change without notice.

AlGaInP Visible Laser Diode

ADL-63059TU

6-2D-LD63-045 Rev.03

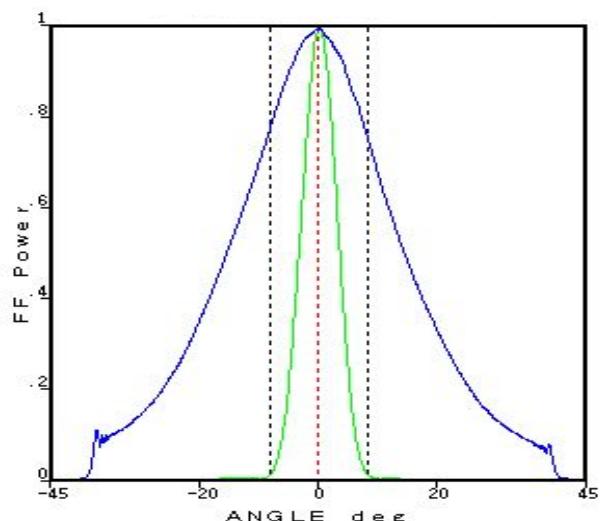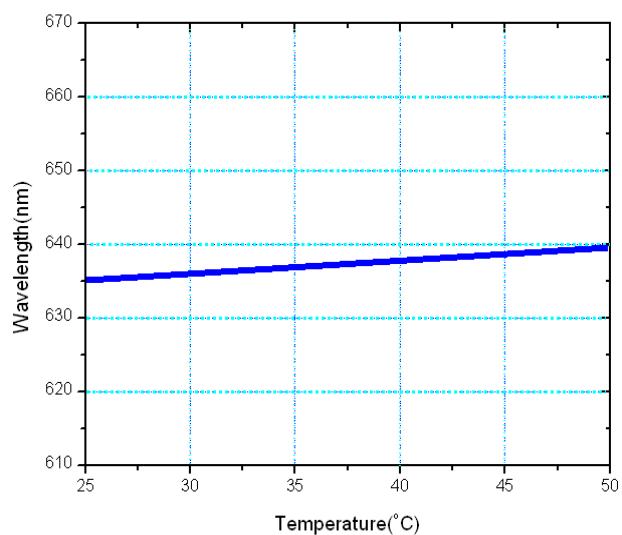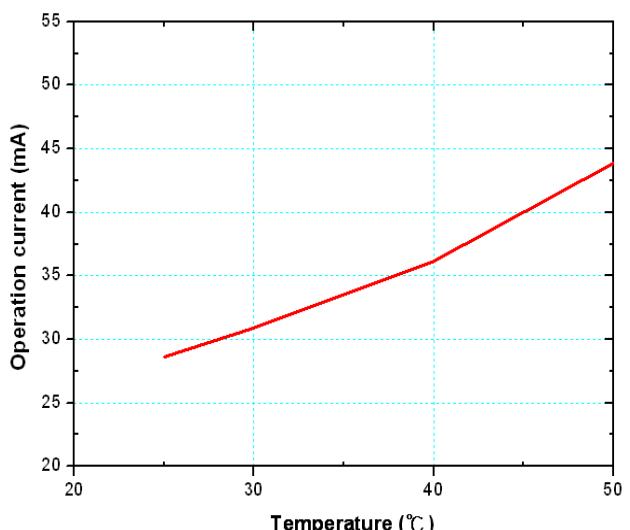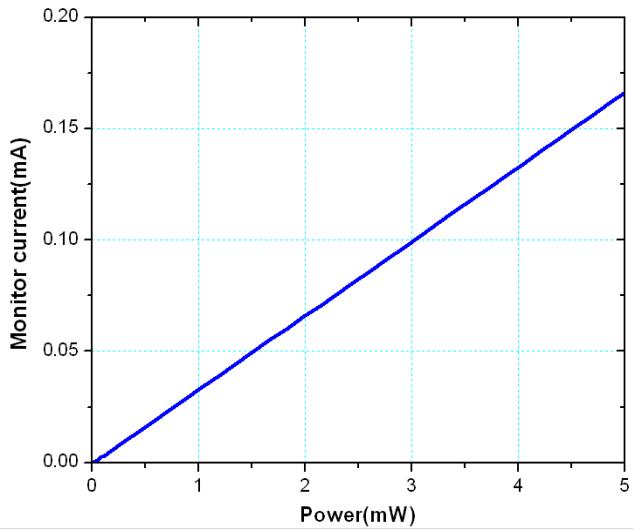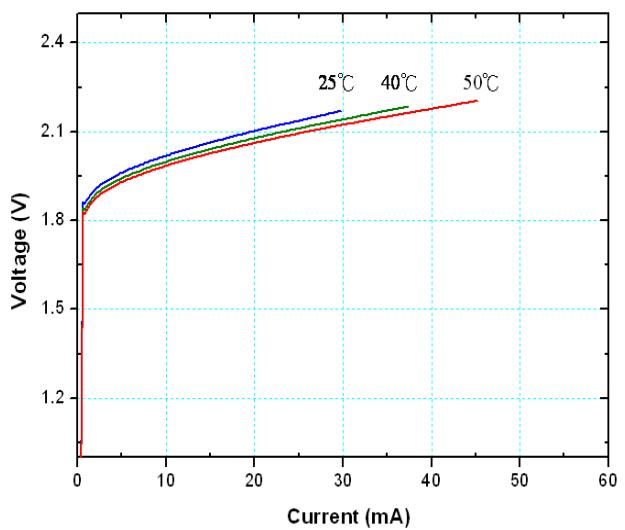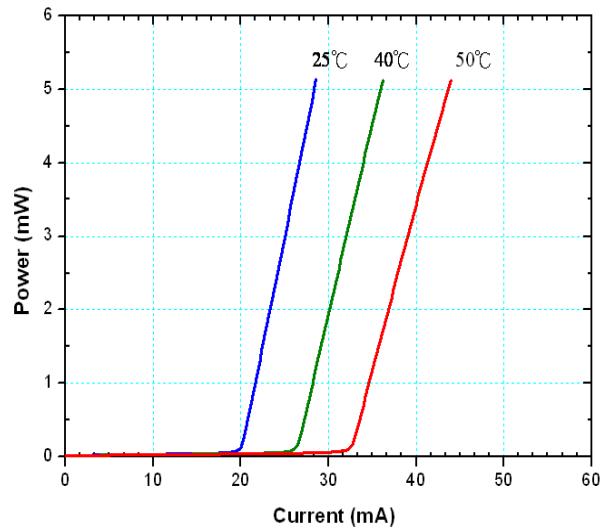

* For reference only. Contents above are subject to change without notice.

Arima
LASERS