

# AlGaInP | Visible Laser Diode

## ADL-78101SL

- $\Phi$  3.3mm Mini Package
- 780nm 10mW 60°C Reliable Operation

### Features

1. Low operating current
2. High efficiency
3. Better power budget for optical design
4. Smallest package

### Applications

1. Industrial Tools
2. Mini size optical modules

### Absolute maximum ratings


Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_O$	CW	12	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Reverse voltage (PD)	$V_{RD}$	-	30	V
Forward current (PD)	$I_{FD}$	-	10	mA
Case temperature	$T_C$	-	-10~+60	°C
Storage temperature	$T_S$	-	-40~+85	°C

### Electrical and optical characteristics ( $T_C=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	770	780	790	nm	$P_O=10\text{ mW}$
Threshold current	$I_{th}$	-	15	25	mA	
Operating current	$I_{op}$	-	30	40	mA	$P_O=10\text{ mW}$
Operating voltage	$V_{op}$	-	1.9	2.2	V	$P_O=10\text{ mW}$
Differential efficiency	$\eta$	0.4	0.6	0.8	mW/mA	$P_O=7\text{-}10\text{ mW}$
Monitor current	$I_m$	0.5	1.0	1.5	mA	$P_O=10\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{//}$	7	11	15	deg.	$P_O=10\text{ mW}$
Perpendicular divergence angle	$\theta_{\perp}$	24	28	32	deg.	
Parallel FFP deviation angle	$\Delta\theta_{//}$	-2	0	+2	deg.	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	0	+3	deg.	
Emission point accuracy	$\Delta x\Delta y\Delta z$	-80	0	+80	um	

### Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

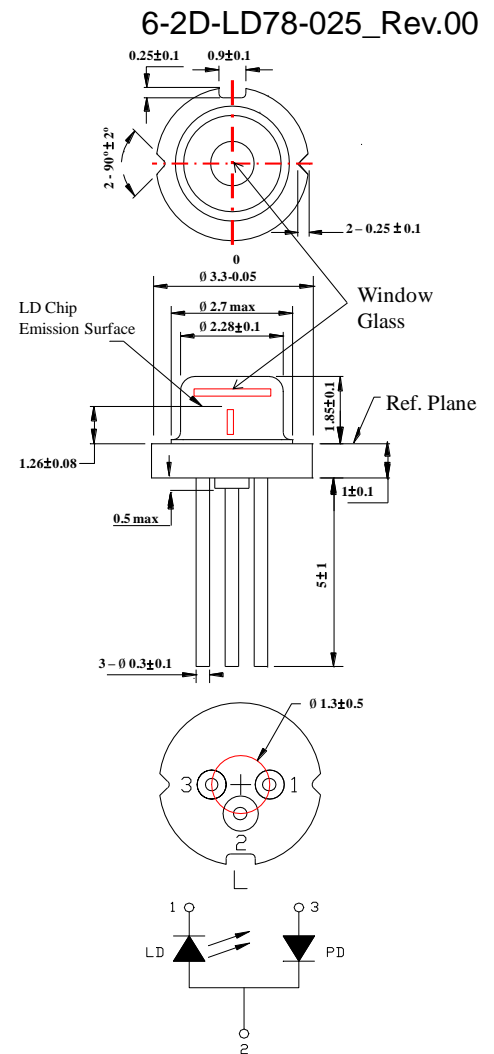

### ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.







**Arima**  
LASERS

# AlGaInP | Visible Laser Diode

## ADL-78101SL

6-2D-LD78-025\_Rev.00

- $\Phi$  3.3mm Mini Package
- 780nm 10mW 60°C Reliable Operation

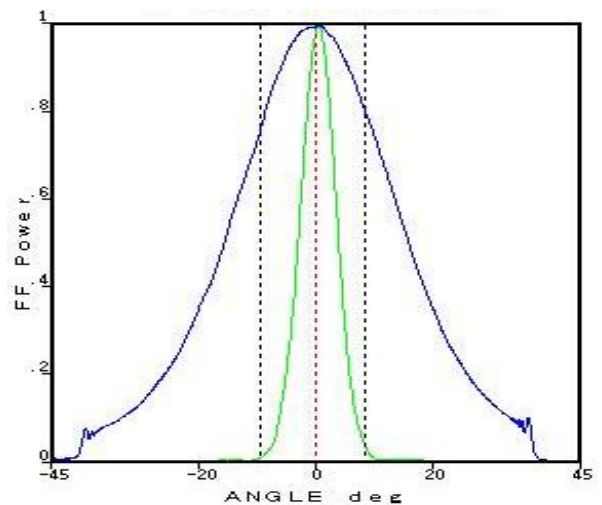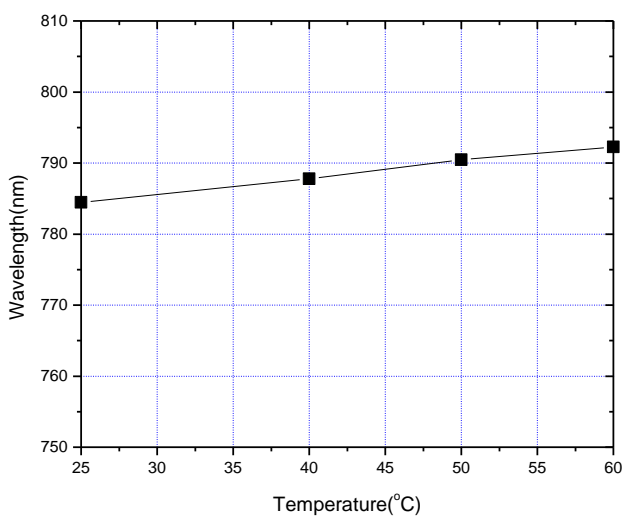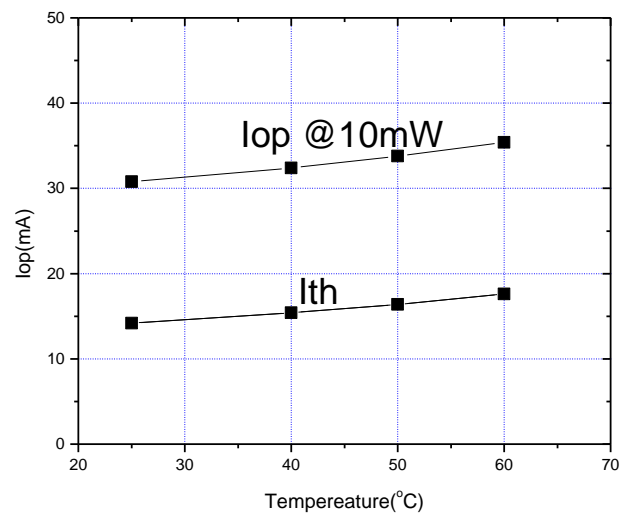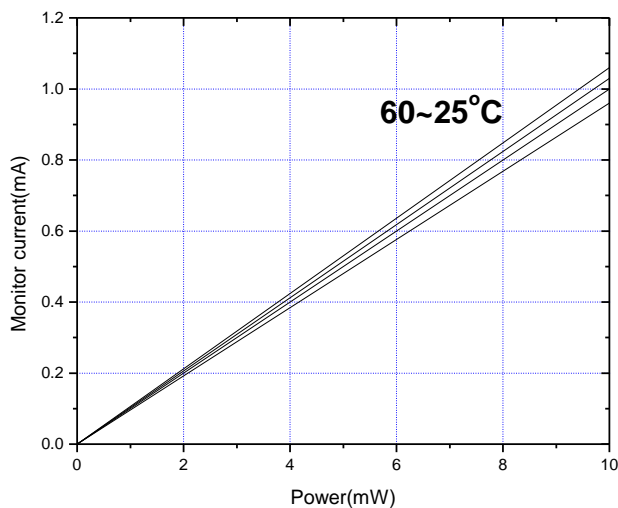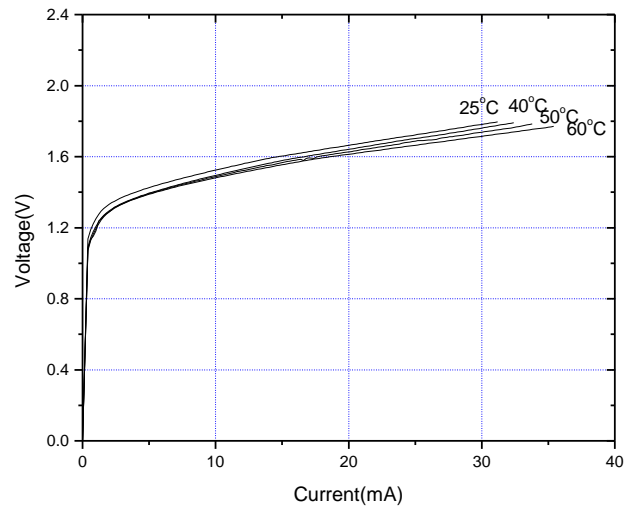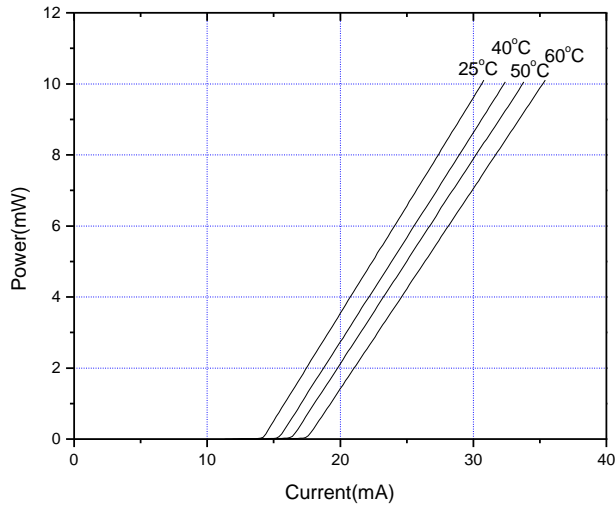

ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

**Arima**  
LASERS